


Rockfon® Medicare™ Air

Datasheet



Rockfon® Medicare™ Air


- Specifically designed for use in pressurised healthcare environments where differential air pressure is required to prevent infection spreading eg. surgeries, recovery rooms, intensive care, etc.
- Does not contribute to the growth of MRSA, low particle emission (ISO Class 3)
- Can be cleaned with standard detergents and effectively disinfected by dry steam cleaning
- Class B sound absorption and highest fire safety (Class A1)
- Basic A-edge tile available in standard dimensions

Product Description

- Stone wool tile
- Visible side: micro-textured white painted, water repellent fleece
- Rear side: airtight high performance membrane
- Sealed edges

Application Areas

- Healthcare

Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System
 <p>A24</p>	600 x 600 x 25	2,7	Chicago Metallic™ T24 3830
	1200 x 600 x 25	2,7	Chicago Metallic™ T24 3830




Performance



Sound absorption

α_w : 0.80 (Class B)

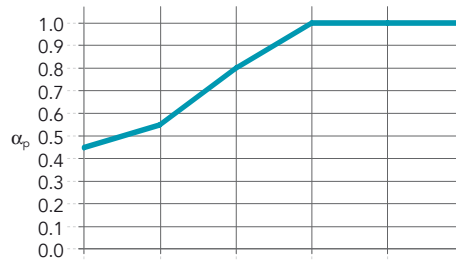

Thickness (mm) /
Suspension (incl. tile - mm)

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
25 / 200	0.45	0.55	0.80	1.00	1.00	1.00	0.80	B	0.90



Reaction to fire

A1



Light reflection

85%



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
C/0N



Cleaning

- Vacuum
- Damp cloth
- Dry steam cleaning (twice a year)
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine, quaternary ammonium and hydrogen peroxide



Hygiene

Stone wool provides no sustenance to microorganisms

Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013. Tested with:

- Methicillin Resistant Staphylococcus Aureus (MRSA)
- Candida Albicans
- Aspergillus Brasiliensis

The bactericidal and fungicidal effect of dry steam cleaning meets the requirements of NF EN 14561 (> 5 log10) and NF EN 14562 (> 4 log10), meaning the disinfection is very effective.



Air pressure

Suitable in areas where differential pressure is required to prevent infections from spreading. Due to its high performance membrane and sealed edges, combined with HDC2 clips (8 clips per 600 x 600mm tile), it achieves an air leakage rate of less than 0.5m³/h/m²/Pa under a pressure range of 5 to 40 Pa. Rockfon recommends the addition of closed cell neoprene foam tape on the grid system or the use of gasket grid to improve performance in areas where air pressure requirements are more stringent. For more information, please contact customer service.



Clean Room

ISO Class 3



Surface durability

Enhanced durability and dirt resistance.



Environment

Fully recyclable



Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark
of the ROCKWOOL Group.

02.2019 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Rockfon Hong Kong

Chicago Metallic (Asia Pacific) Ltd.
Room 1217, 12/F,
Houston Centre,
63 Mody Road,
Tsim Sha Tsui East,
Kowloon, Hong Kong
Tel: (+852) 2576-6117
Fax: (+852) 2576-6326

Rockfon Malaysia

Chicago Metallic (Malaysia) Sdn Bhd
PTD 220527,
Jalan Indah Gemilang,
Taman Perindustrian Cemerlang,
81800 Ulu Tiram,
Johor, Malaysia
Tel: (+607) 863 3539
Fax: (+607) 863 1525

Rockfon Singapore

ROCKWOOL Building Materials
(Singapore) Pte Ltd.
No. 8, Tuas Avenue 2
Jurong Town
Singapore 639448
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533

